

NH25L

Thermal Scope



HIKMICRO NEOS NH25L Thermal Image Scope boasts 320×240 resolution, and is equipped with NETD < 18mK thermal detector. The advanced Image Pro 3.0 algorithm, shutterless system (HSIS) and Sync Pro algorithm ensures users catch seamless and detailed image with lower latency. With a 0.49" AMOLED larger display, NH25L offers immersive viewing experience. The laser rangefinder and ballistic calculation contribute to more accurate shooting.

● Key Feature

- High sensitivity thermal module NETD < 18 mK (@25°C, F# = 1.0)
- HIKMICRO Shutterless Image System (HSIS) & Zoom Pro
- 0.49" AMOLED Large Display
- 550g lightweight, with a compact and ergonomic design
- 1000m Laser Rangefinder with Ballistic Calculation
- 1-second Quick Start-up
- 9-hour Operation Time
- Quick Zeroing on Sight APP

• Specification


Thermal Module	
Image Sensor	VOx Uncooled Focal Plane Arrays
Max. Resolution	320 × 240
Frame Rate	50 Hz
Pixel Interval	12 μm
Response Waveband	8 μm to 14 μm
NETD	Less than 18 mK (@25°C, F# = 1.0)
Lens (Focal Length)	25mm, F1.0
Focus Mode	Focus Ring
Detection Range	1200m
Min. Focusing Distance	3m
Magnification	3.5× - 24.5×
Field of View(H × V), Degrees / m @100m	7.0° × 5.3°/ 12.2 m x 9.3 m
Image Display	
Display	0.49-inch AMOLED, 1920*1080
Palettes	Black Hot, White Hot, Red Hot, Fusion, Red Monochrome, Green Monochrome
Exit Pupil	8mm
Eye Relief	55mm
Diopter (Range)	-4D to 4D
Brightness Adjustment	Yes
Tone Adjustment	Cold, Warm
Contrast Adjustment	Yes
Zoom Pro	Yes
HSIS (HIKMICRO Shutterless Image System)	Yes
Image Pro 3.0	Yes
Sync Pro	Yes
System	
Record Video	On-board Video Recording
Capture Snapshot	Yes
Hotspot	Yes
Standby Mode	Yes
Storage	Built-in EMMC (64 GB)
PIP	Yes
Local Album	Yes
Audio Recording	Yes
Recoil-activation Recording	Yes
Freeze Zeroing	Yes
Max. Recoil	1000g/0.4ms
Zeroing Profiles	5
Ballistic Calculation	Yes
Click Value	1 click = 1cm @ 100m
Distance Measurement	Yes

Power Supply	
Battery Type	One Rechargeable Lithium Battery (Internal), One Replaceable and Rechargeable 18650 Battery (External)
Battery Operating Time	9 hours continuous running (@25°C, Zoom Pro, LRF on)
Type-C Power Supply	5 V DC/2 A, USB Type-C interface Supports QC3.0 * Only the built-in battery will be charged via the type-C cable. Use the battery charger to charge the external battery.
General	
Protection Level	IP67
Mounting	Standard 30mm
Dimension	345.6mm×86.1mm×75.8mm
Working Temperature	-30 °C to 55 °C (-22 °F to 131°F)
Weight	550g
Center Height	32mm
Laser Rangefinder	
Safety Class for Laser	Class 1
Wavelength	905 nm
Max. Measuring Range	1000 m
Measurement Accuracy	±1 m
Min. Measuring Range	10 m

▪ Available Model

HM-TR32-25Y1G/W1L-NH25L

▪ Dimension

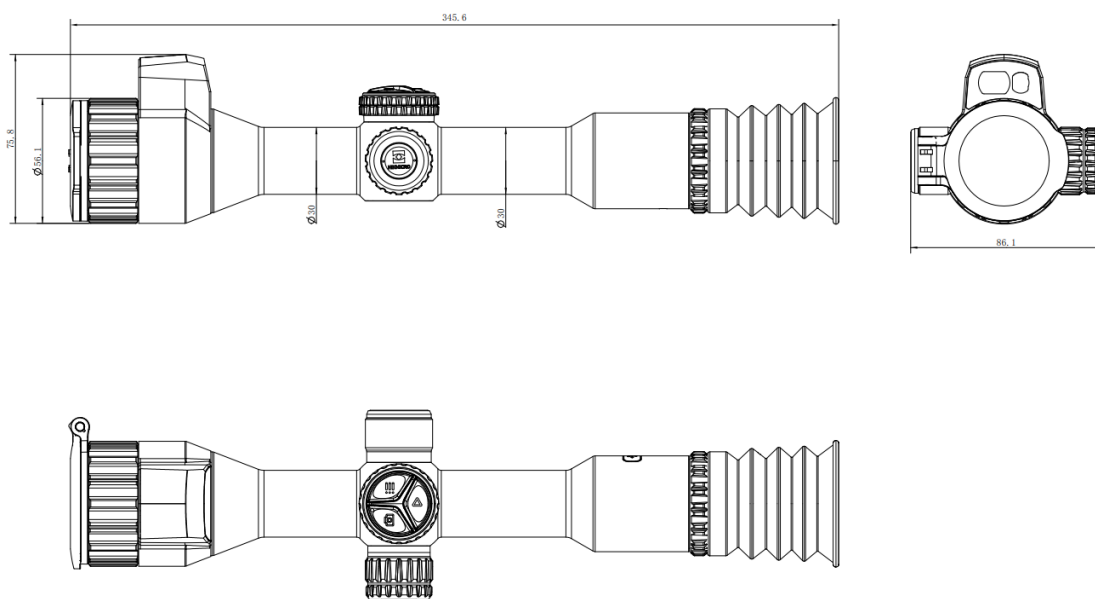

Accessory



Quick Start Guide
(× 1)



Type-C Cable (×
1)



Lint-free Cloth
(× 1)



Battery (× 1)



Battery Charger
(× 1)

▪ Accessories

Accessory



Quick Start Guide
(× 1)



Type-C Cable (×
1)



Lint-free Cloth
(× 1)



Battery (× 1)



Battery Charger
(× 1)



Hikmicro Hunting.Global HIKMICRO Outdoor www.hikmicrotech.com [hikmicro_hunting_global](https://www.instagram.com/hikmicro_hunting_global) HIKMICRO info@hikmicrotech.com

Room 313, Unit B, Building 2, 399 Danfeng Road, Xixing Subdistrict, Binjiang District, Hangzhou, Zhejiang
© Hangzhou Microimage Software Co., Ltd. All rights reserved. | Data subject to change without notice!